E Series

PRI
FEST
FARNA

EI2.6 | EI2.8 | EI2.9 | EI3.9 | EI4.8 | EI5.9 | EI6.2

EO3.9 | EO4.8 | EO5.9 | EO6.2

- ☆ Front Maintenance
- ☆ Curved Installation
- ☆ No Light Leakage
- ☆ Light and Thin
- ☆ Cost Effective

Parameter

E Series Outdoor	EO 3.9	EO 4.8	EO 5.9	EO 6.2

LEDFUL

Pixel Pitch(mm)	3.91mm	4.81mm	5.95mm	6.25mm
Pixel Matrix Per Sq.m	65536	43264	28224	25600
Pixel Configuration	SMD1921	SMD2727/1921	SMD3535	SMD3535
Brightness (nits)	≥4000	≥4500	≥4500	≥4000
Scan	1/16	1/13	1/7	1/10
Cabinet Resolution	128×256	104×208	84×168	80×160
Power Con. (Max / Avg)	750/ 230 w/sq.m	700 / 220 w/sq.m	700 / 220 w/sq.m	710/ 210 w/sq.m
Module Dimension	250x250mm / 0.82x0.82ft			
Cabinet Dimension	500x1000x80mm / 1.64x3.28x0.26ft			
Cabinet Weight	13kg / 28.66lb ((Die-casting Aluminum)			
Service Access	Front / Rear			
Rotation Angle	-10° and +10°			
Refresh Rate (HZ)	1920			
Grey Scale (bit)	16			
Viewing Angle (H/V)	160 / 160			
IP Rate	IP65			
Input Voltage (AC)	110 / 240			

* Specifications and photos are subject to change without prior notice.

E Series Indoor	EI 2.8	EI 2.9	EI 3.9	EI 4.8	EI 5.9	EI 6.2
Pixel Pitch(mm)	2.84mm	2.976mm	3.91mm	4.81mm	5.95mm	6.25mm
Pixel Matrix Per Sq.m	123904	112896	65536	43264	28224	25600
Pixel Configuration	SMD2121	SMD2121	SMD2121	SMD2121	SMD3528	SMD3528
Scan	1/22	1/28	1/16	1/13	1/7	1/10
Cabinet Resolution	176×352	168×336	128×256	104×208	84×168	80×160
Power Con. (Max / Avg)	800 / 250w/sq.m	780 / 240w/sq.m	700 / 220w/sq.m	680 / 200w/sq.m	680 / 200w/sq.m	700 / 210w/sq.m
Module Dimension	250x250mm / 0.82x0.82ft					
Cabinet Dimension	500x1000x80mm / 1.64x3.28x0.26ft					
Cabinet Weight	13kg / 28.66lb ((Die-casting Aluminum)					
Service Access	Front / Rear					
Rotation Angle	-10° and +10°					
Brightness (nits)	≥1000					
Refresh Rate (HZ)	3840					
Grey Scale (bit)	16					
Viewing Angle (H/V)	160 / 160					
IP Rate	IP31					
Input Voltage (AC)	110 / 240					

* Specifications and photos are subject to change without prior notice.

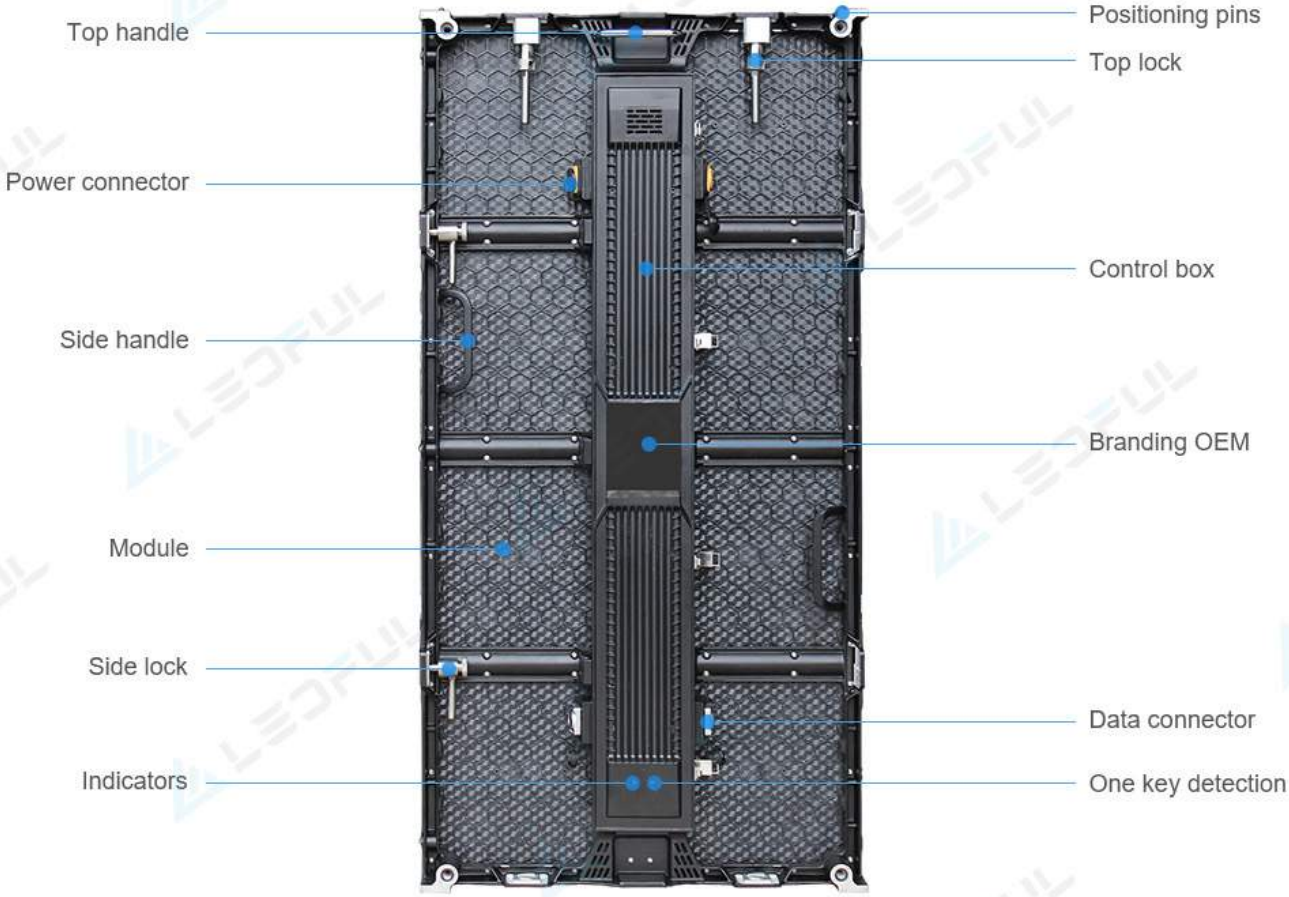

Front Maintenance

The magnet LED modules can be removed by tools on front side.

Curved Installation

Curved with every 2.5° between -10°and 10°, which can make convex and concave.

LEDFUL

No light leakage trouble

No light leakage design with specific strips on side of cabinet and behind neighbour module.

Cost Effective Option

E series is “double L series” which will save cost and time during installation.
L series and E series can be installed together for various installation.

LEDFUL

LEDFUL

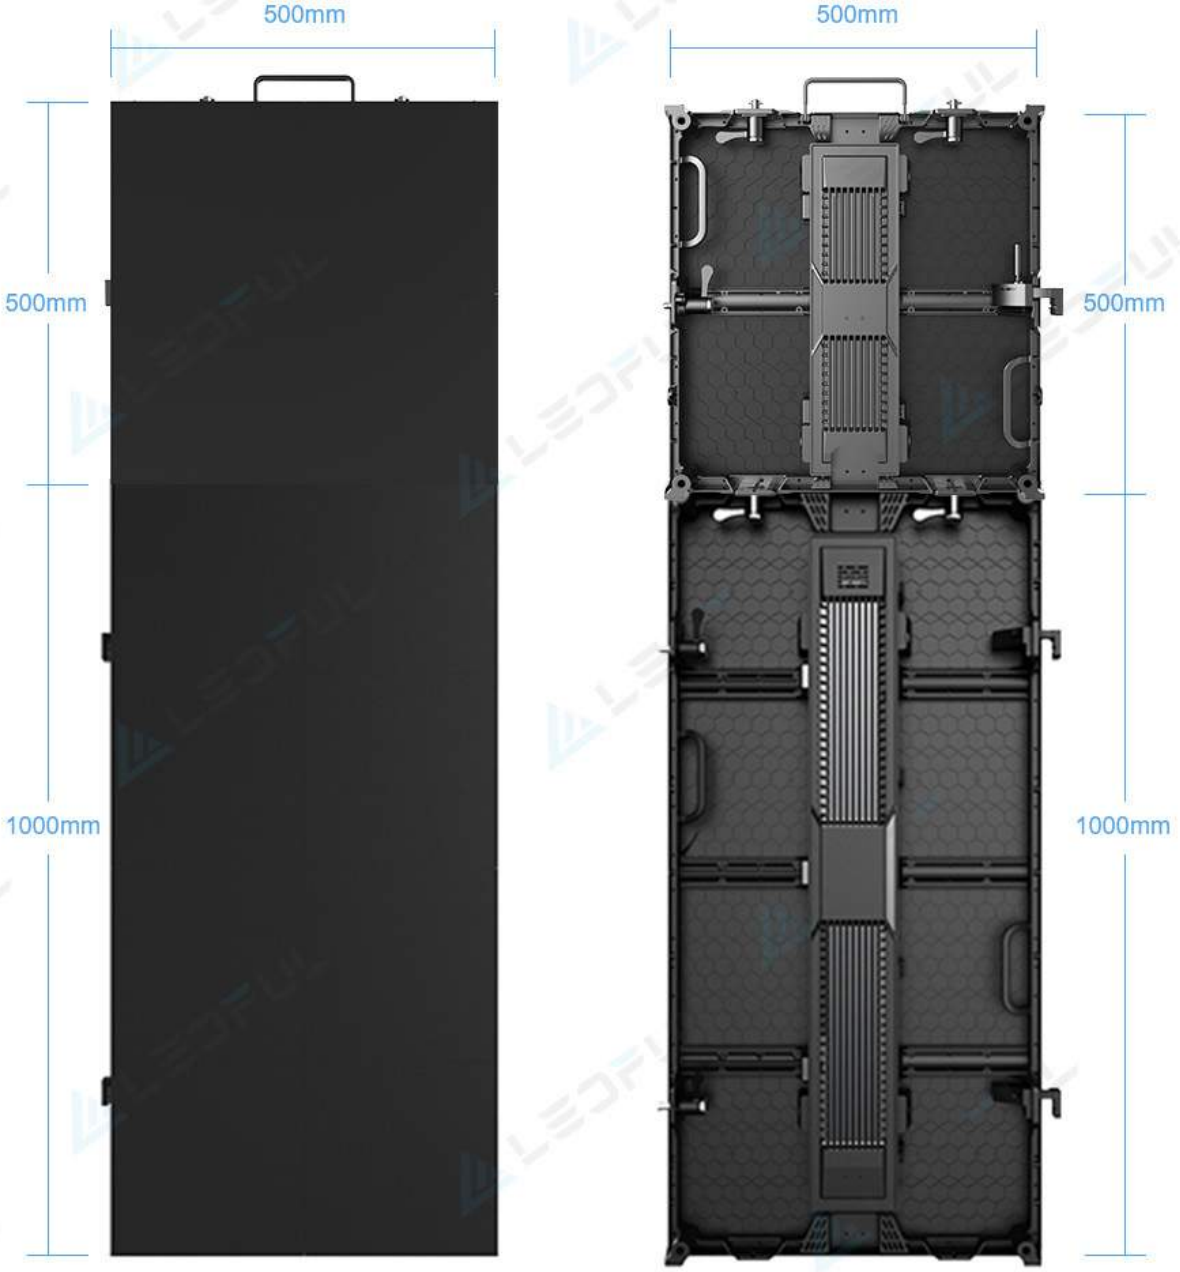

Ultra Fast Response

The response speed exceeds the response limit of the naked eyes,
while playing the high speed dynamic images in an LED Screen,
it will have more advantages, there will be no ghosting&twisting and it will perfectly provide the dynamic images.

Perfect rendering dynamic picture

Response speed

Smear, Ghosting phenomenon

Ultra Wide Viewing Angle

Both 160° from horizontal & vertical for the viewing angle.
Seeing from five directions, it would be still the natural and clear image in an LED display.

Accessories

Power Cable

Data Cable

Main Power Cable

Main Data Cable

LEDFUL

Controller &Processor

Front Maintenance Tool

Curved Lock

Hanging Bar

LEDFUL

---

sales@LEDFUL.com

+86-135-30172435

www.LEDFUL.com